




PLAYdate

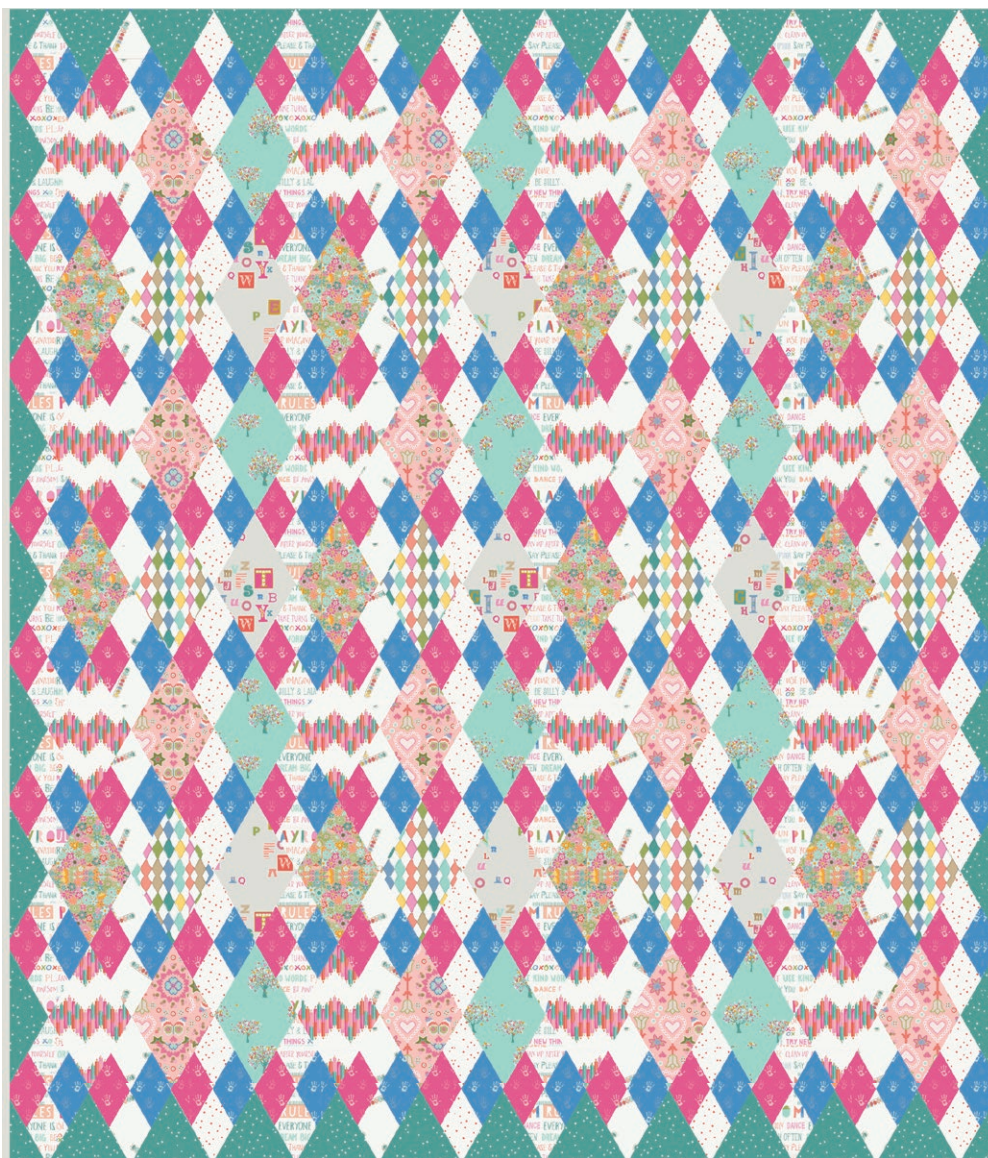

ANGLES

A DIVISION OF AGF

FREE PATTERN




PLAYdate


QUILT DESIGNED BY MISTER DOMESTIC

PLAYROOM

FABRICS DESIGNED BY MISTER DOMESTIC

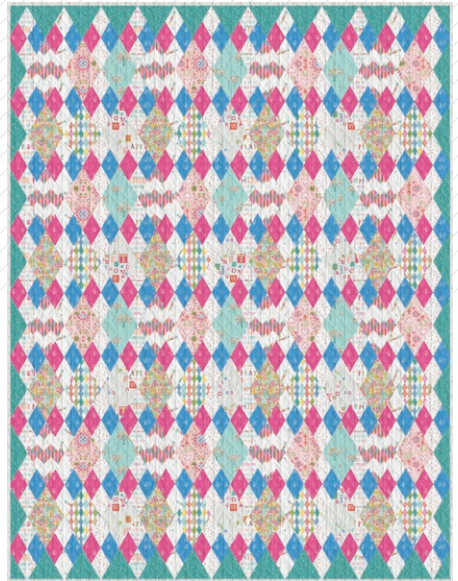

PLR-89800
A HAPPY LIFE



PLR-89801
TEENY CONFETTI CANDY




PLR-89802
GROWING HEARTS



PLR-89803
FUNLOVING



PLR-89804
FINGERPAINT PINK



PLR-89805
BELLE AQUARELLE




PLR-89806
AS EASY AS ABC



PLR-89807
FLOWERS ALL AROUND



PLR-89808
COLOR MY WORLD



PLR-89809
TEENY CONFETTI MINT



PLR-89810
PLAYROOM RULES



PLR-89811
FINGERPRINT COBALT





FINISHED SIZE | 68" x 82"

FABRIC REQUIREMENTS

Fabric A	PRL-89800	½ yd.
Fabric B	PRL-89801	¾ yd.
Fabric C	PRL-89802	½ yd.
Fabric D	PRL-89803	½ yd.
Fabric E	PRL-89804	¾ yd.
Fabric F	PRL-89805	⅓ yd.
Fabric G	PRL-89806	½ yd.
Fabric H	PRL-89807	½ yd.
Fabric I	PRL-89808	½ yd.
Fabric J	PRL-89809	½ yd.
Fabric K	PRL-89810	⅓ yd.
Fabric L	PRL-89811	¾ yd.

BACKING FABRIC

PRL-89807 4 ½ yds. (suggested)

BINDING FABRIC

PRL-89801 (Fabric B) (included)


CUTTING DIRECTIONS

¼" seam allowances are included.
WOF means width of fabric.

Six (6) 3" x WOF strips from fabrics **B**, **F** and **K**. Subcut eleven (11) 6 point diamonds from each strip,


A total of sixty four (64) diamonds are required for each fabric.

To cut the diamonds, line the 60° line on a ruler to the bottom edge of the strip and cut.

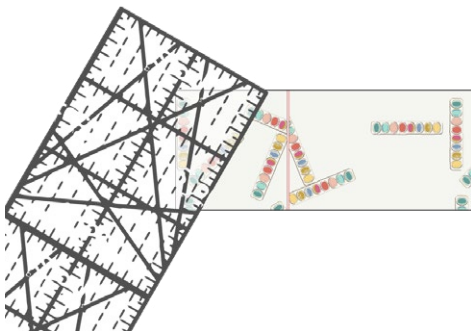

Line the new diagonal line with the 3" line on the ruler, cut to create the first diamond, continue this process through the length of each strip.

A total of sixty four (64) diamonds are required for each fabric.

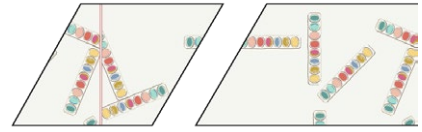

Three (3) 5½" x WOF strips from fabrics **A**, **C**, **D**, **G**, **H** and **I**, subcut six (6) 6-point diamonds from each strip, Cut a total of twelve diamonds for fabrics **C** and **G**, a total of sixteen diamonds for fabrics **A** and **I** a total of twelve diamonds for fabrics **D** and **H**.

Eight (8) 3" x WOF strips from fabrics **E** and **L**. Subcut ninety six (96) 6-point diamonds from each fabric.

Three (3) 5½" x WOF strips from fabrics **J**, Subcut nineteen (19) 6-point diamonds. Sub-cut eleven diamonds in half horizontally and seven vertically. Cut the remaining diamond in quarters.

CONSTRUCTION

Sew all rights sides together with ¼" seam allowance.

- When sewing diamonds together, make certain that the points of each diamond along the stitch line extend beyond the edge of the opposing diamond by ¼".


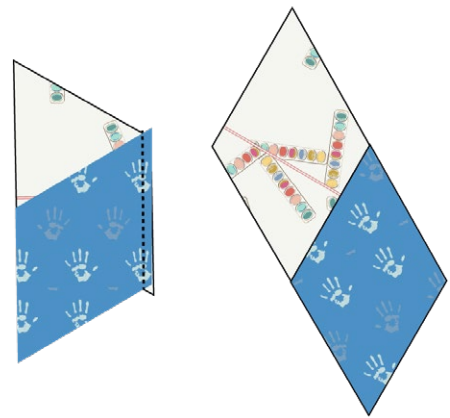


DIAGRAM 1

- Following the layout in the cover picture, sew each grouping of four smaller diamonds together.
- First, sew two opposing pairs of diamonds together.
- Press open.
- Sew the two pairs together.
- Press open.
- Sew all quarters of smaller diamonds together.



DIAGRAM 2

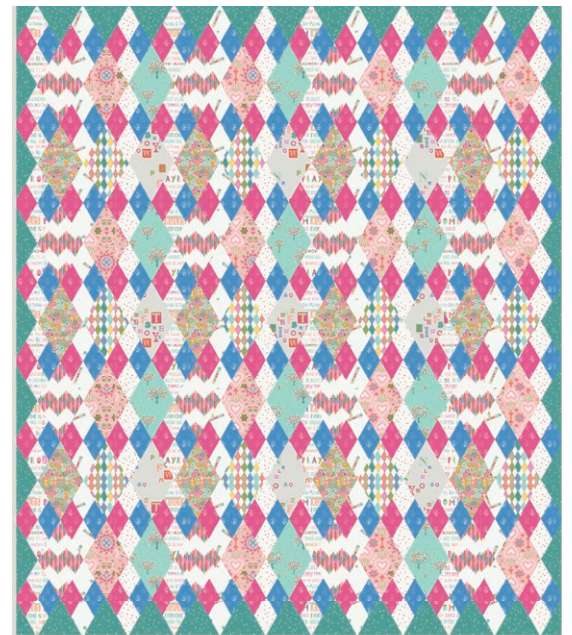

ASSEMBLING THE TOP

Sew all rights sides together with $\frac{1}{4}$ " seam allowance. Press open.


- Once all the smaller diamonds have been sewn, begin sewing each diagonal row using the same technique as the smaller diamonds.
- Follow the cover picture for fabric placement.
- Press Open.
- Sew each row together ensuring that each intersection touches $\frac{1}{4}$ " from the raw edge.
- Press open.

QUILT ASSEMBLY

Sew rights sides together.

- Place BACKING FABRIC on a large surface wrong side up. Stretch it with masking tape against that surface.
- Place BATTING on top of backing fabric.
- Place TOP on top of the batting with right side facing up. Smooth away wrinkles using your hands.
- Pin all layers together and baste with basting thread, using long stitches. You can also use safety pins to join the layers.
- Machine or hand quilt starting at the center and working towards the corners. Remember that quilting motifs are a matter of personal preference. Have fun choosing yours!
- After you finished, trim excess of any fabric or batting, squaring the quilt to proceed to bind it.

- Trim seam to ¼" and press open. Complete the sewing. Turn binding to back of the quilt, turn raw edge inside and stitch by hand using blind stitch.

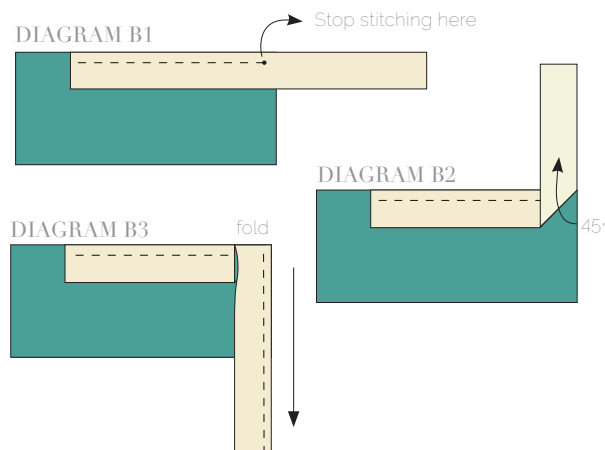

BINDING

Sew rights sides together.

- Cut enough strips 1½" wide by the width of the fabric B to make a final strip 310" long. Start sewing the binding strip in the middle of one of the sides of the quilt, placing the strip right side down and leaving an approximated 5" tail. Sew with ¼" seam allowance (using straight stitch), aligning the strip's raw edge with the quilt top's raw edge.
- Stop stitching ¼" before the edge of the quilt (DIAGRAM B 1). Clip the threads. Remove the quilt from under the machine presser foot. Fold the strip in a motion of 45° and upward, pressing with your fingers (DIAGRAM B2). Hold this fold with your finger, bring the strip down in line with the next edge, making a horizontal fold that aligns with the top edge of the quilt (DIAGRAM B3). Start sewing at ¼" of the border, stitching all the layers. Do the same in the four corners of the quilt.
- Stop stitching before you reach the last 5 or 6 inches. Cut the threads and remove the quilt from under the machine presser foot. Lay the loose ends of the binding flat along the quilt edge, folding the ends back on themselves where they meet. Press them together to form a crease. Using this crease as the stitching line, sew the two open ends of the binding with right sides together (you can help yourself marking with a pencil if the crease is difficult to see).



artgalleryfabrics.com

NOTE: While all possible care has been taken to ensure the accuracy of this pattern, We are not responsible for printing errors or the way in which individual work varies. Please read instructions carefully before starting the construction of this quilt. If desired, wash and iron your fabrics before starting to cut.