

▶▶ RUSTIC Reflections

FINISHED SIZE | 96½" x 96½"

Please read all instructions thoroughly before beginning.

FABRIC REQUIREMENTS

Fabric A	TBW65612	2¼ yd.
Fabric B	TBW65609	⅝ yd.
Fabric C	TBW65602	1¼ yd.
Fabric D	TBW65606	1¼ yd.
Fabric E	PE493	1 yd.
Fabric F	PE557	1¼ yd.
Fabric G	PE500	2¼ yd.
Fabric H	TBW65611	1¼ yd.
Fabric I	TBW65603	1 yd.
Fabric J	TBW65613	⅝ yd.
Fabric K	BINTBW65	¾ yd.

BACKING FABRIC
TBW65610 9 yds (Suggested)

BINDING FABRIC
Fabric **K** BINTBW65 ¾ yd. (Included)

CUTTING DIRECTIONS

Please ensure that all fabrics are ironed thoroughly before cutting them. ¼" seam allowances are included. WOF means width of the fabric.

Fabric A

- Cut (8) 9-¾" x WOF strips, then:
Sub-cut into (32) 9-¾" squares.

Fabric B

- Cut (2) 9-¾" x WOF strips, then:
Sub-cut into (5) 9-¾" squares.

Fabric C

- Cut (4) 9-¾" x WOF strips, then:
Sub-cut into (14) 9-¾" squares.

Fabric D

- Cut (4) 9-¾" x WOF strips, then:
Sub-cut into (14) 9-¾" squares.

Fabric E

- Cut (3) 9-¾" x WOF strips, then:
Sub-cut into (9) 9-¾" squares.

Fabric F

- Cut (4) 9-¾" x WOF strips, then:
Sub-cut into (14) 9-¾" squares.

Fabric G

- Cut (8) 9-¾" x WOF strips, then:
Sub-cut into (32) 9-¾" squares.

Fabric H

- Cut (4) 9-¾" x WOF strips, then:
Sub-cut into (14) 9-¾" squares.

Fabric I

- Cut (3) 9-¾" x WOF strips, then:
Sub-cut into (9) 9-¾" squares.

Fabric J

- Cut (2) 9-¾" x WOF strips, then:
Sub-cut into (5) 9-¾" squares.

Fabric K

- Ten (10) 2½" x WOF strips. (Binding)

CONSTRUCTION

Sew all rights sides together with 1/4" seam allowance.

Half Square Triangle (HST) Construction.

Magic 8 method:

- Start by placing (1) 9-3/4" square from fabric **A** and **B** right sides facing together.
- Mark a diagonal line across both diagonals on the wrong side of the top fabric square (Fig. 1)
- Sew a **SCANT** 1/4" seam on each side of each diagonal line and press the sewn square to set the seams (Fig. 2)
- To separate the square into eight units you will be making four cuts: a vertical, a horizontal, and two diagonal. As you make the cuts, don't rotate the fabric or your pieces may shift position. Instead, rotate the mat or walk around it.
- Open the blocks outward and lightly press. Be very careful to only press up and down, NOT back and forth so as not to stretch them. Your seam should be pressed (both layers) toward the darker color.
- Trim each half square triangle (HST) to a 4 1/2" square.
- Repeat this technique with the same fabrics four more times. You should have a total of (36) **A-B** hst units.

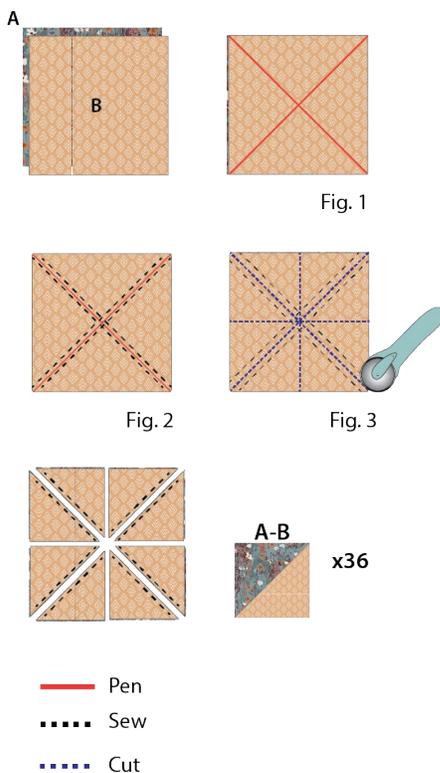


DIAGRAM 1

- Repeat the Magic 8 with (9) 9-3/4" from fabrics **C** and **E**. You should have a total of (72) **C-E** hst units.



DIAGRAM 2

- Repeat the Magic 8 with (14) 9-3/4" from fabrics **D** and **F**. You should have a total of (108) **D-F** hst units.



DIAGRAM 3

- Repeat the Magic 8 with (18) 9-3/4" from fabrics **A** and **G**. You should have a total of (144) **A-G** hst units.




DIAGRAM 4

- Repeat the Magic 8 with (14) 9-3/4" from fabrics **G** and **H**. You should have a total of (108) **G-H** hst units.




DIAGRAM 5

- Repeat the Magic 8 with (9) 9-3/4" from fabrics **A** and **I**. You should have a total of (72) **A-I** hst units.




DIAGRAM 6

- Repeat the Magic 8 with (5) 9-3/4" from fabrics **J** and **C**. You should have a total of (36) **J-C** hst units.



DIAGRAM 7

Block Construction

Section 1

- Arrange (12) HST units into four rows of four pieces each and sew them.
- Sew all rows together and make a total of (18) section 1.

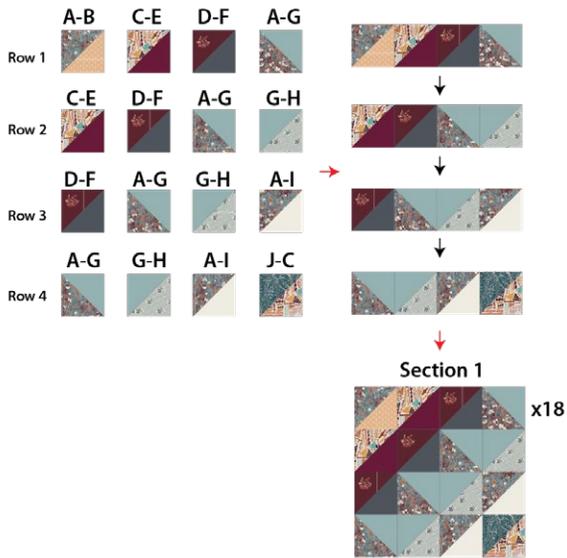


DIAGRAM 8

Section 2

- Arrange (12) HST's units into four rows of four pieces each and sew them.
- Sew all rows together and make a total of (18) section 2.

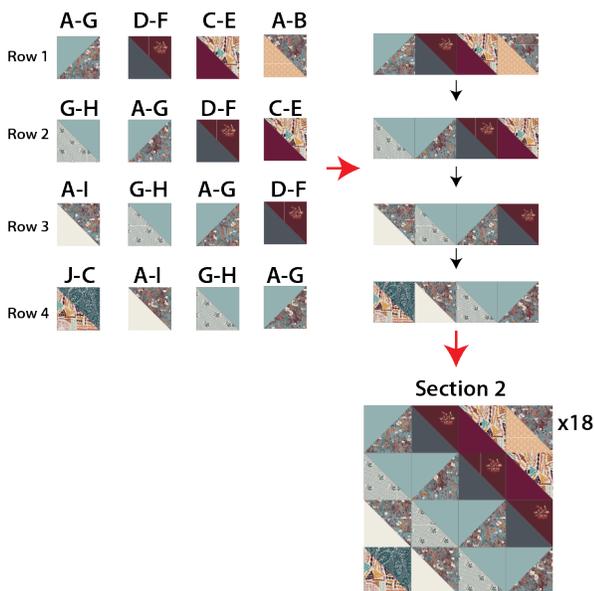


DIAGRAM 9

- Join (2) section 1 and 2 as shown on diagram below and sew. Make a total of 9 identical blocks

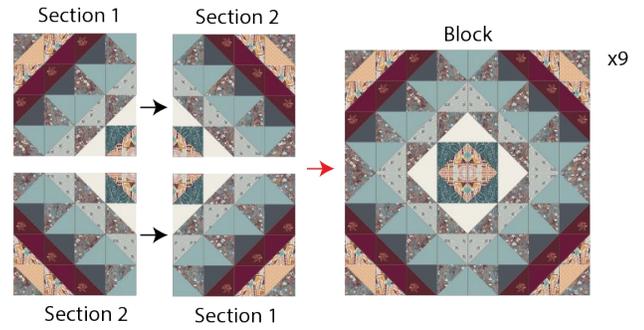


DIAGRAM 10

QUILT TOP

- Arrange all (9) blocks into 3 rows of 3 blocks each and sew per row, then sew rows together.

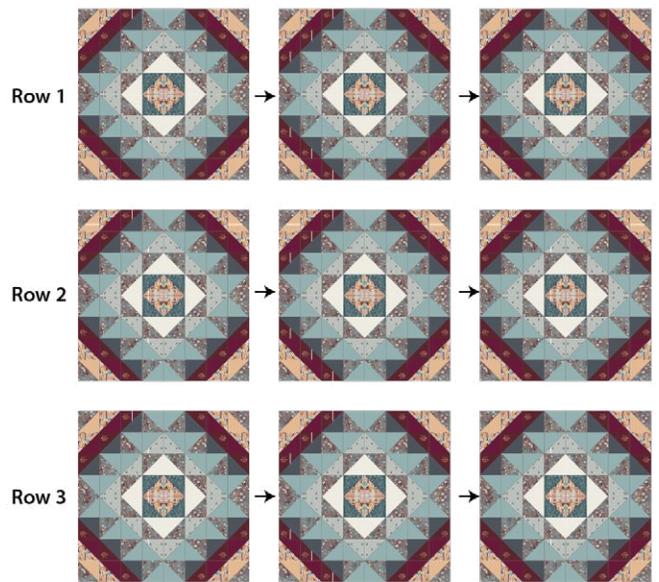


DIAGRAM 11

- Quilt as desired.



DIAGRAM 12

QUILT ASSEMBLY

Sew rights sides together.

- Place BACKING FABRIC on a large surface wrong side up. Stretch it with masking tape against that surface.
- Place BATTING on top of backing fabric.
- Place TOP on top of the batting with right side facing up. Smooth away wrinkles using your hands.
- Pin all layers together and baste with basting thread, using long stitches. You can also use safety pins to join the layers.
- Machine or hand quilt starting at the center and working towards the corners. Remember that quilting motifs are a matter of personal preference. Have fun choosing yours!
- After you finished, trim excess of any fabric or batting, squaring the quilt to proceed to bind it.

BINDING

Sew rights sides together.

- Cut enough strips $2\frac{1}{2}$ " wide by the width of the fabric **K** to make a final strip 396" long. Start sewing the binding strip in the middle of one of the sides of the quilt, placing the strip right side down and leaving an approximated 5" tail. Sew with $\frac{1}{4}$ " seam allowance (using straight stitch), aligning the strip's raw edge with the quilt top's raw edge.

- Stop stitching $\frac{1}{4}$ " before the edge of the quilt (DIAGRAM B 1). Clip the threads. Remove the quilt from under the machine presser foot. Fold the strip in a motion of 45° and upward, pressing with your fingers (DIAGRAM B2). Hold this fold with your finger, bring the strip down in line with the next edge, making a horizontal fold that aligns with the top edge of the quilt (DIAGRAM B3). Start sewing at $\frac{1}{4}$ " of the border, stitching all the layers. Do the same in the four corners of the quilt.

- Stop stitching before you reach the last 5 or 6 inches. Cut the threads and remove the quilt from under the machine presser foot. Lay the loose ends of the binding flat along the quilt edge, folding the ends back on themselves where they meet. Press them together to form a crease. Using this crease as the stitching line, sew the two open ends of the binding with right sides together (you can help yourself marking with a pencil if the crease is difficult to see).
- Trim seam to $\frac{1}{4}$ " and press open. Complete the sewing. Turn binding to back of the quilt, turn raw edge inside and stitch by hand using blind stitch.
- If you are using our 2.5 edition (binding fabric), click or scan this QR code to see a tutorial on how to use this specialty fabric.

